


A

B

C

D


REV.	DESCRIPTION	DATE	BY
1	Initial Drawing	06/02/15	Charles

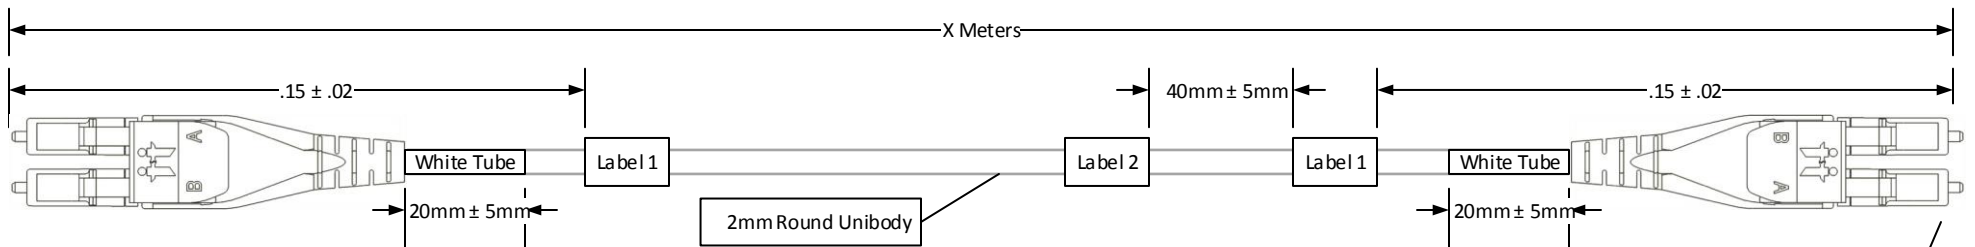

Label 1
 Line 1: P/N
 Line 2: Barcode Unique S/N: Code 128 Auto
 Line 3: Print Unique S/N


 Serial Number xxxxyyzzz, e.g. C102110002
 x: Manufacturing location
 yyyy: Internal work order number
 zzzz: Incrementing serial number

Label 2
 Line 1: UNIVERSALLC ELITE (TM)
 Line 2: Total Cable Solutions

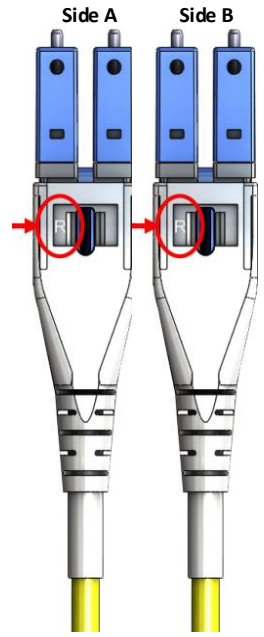

Polarity Reversal Key		
Side A	Side B	Polarity
Blank	Blank	Standard/Crossed
Blank	R	Reversed/Straight
R	R	Standard/Crossed

Notes: Manufactured with Blank on both connectors

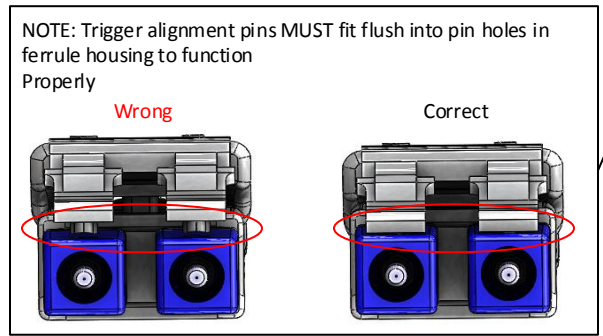

- Notes:
1. Bellcore GR-326 Standard
 2. Plenum Standard Flame rating
 2. Polish Singlemode UPC and Multimode PC
 2. Insertion Loss LC <= 0.15dB (1300nm), Typical 0.10 db
 3. Return Loss Singlemode >=50dB and Multimode >=25dB
 3. Durability of >500 matings
 4. Operating temperature: -20C to + 70C
 8. Storage temperature: -40C to + 85C

Part Number	Glass	Standard Jacket Color	Standard Latch Color	Ferrule Housing
ULE-PPV2V-xxxM	OM4+	Purple	Purple	Black
ULE-4PA2A-xxxM	OM3	Aqua	Aqua	Black
ULE-SPY2B-xxxM	SM	Yellow	Blue	Blue

	Unit: M	1.888.235.2097	WWW.TOTALCABLESOLUTIONS.COM
Approved: Charles Hoskins	06/15/15	Drawing Description	
Checked: Paul Kirk	06/05/15	Universal LC Elite – LC to LC Patch Cord	
Drawing: Charles Hoskins	06/02/15	Part #: ULE-xPx2x-yyyM	



Unless Otherwise Spec Tolerances	
0.	+- 0.5
.0	+- 0.3
.00	+- 0.1

A

B

C

D